

**Declaration Owner**

Aeroflex USA

232 Industrial Park Rd,

Sweetwater, TN 37874 United States

www.aeroflexusa.com | +1.866.237.6235

**Products**

AEROFLEX® sheet and roll insulation products

- AEROFLEX EPDM™ Sheet and Roll
- AEROFLEX EPDM™ Sheet and Roll PSA
- AEROFLEX Breathe-EZ™ Duct Insulation
- AEROFLEX Breathe-EZ™ PSA Duct Insulation

**Functional Unit**1 m<sup>2</sup> of product installed for use over 75 years**EPD Number and Period of Validity**

SCS-EPD-07134

EPD Valid June 15, 2021 through June 14, 2026

Version: June 22, 2023

**Product Category Rule**

PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements.

Version 3.2. Sept. 2018

PCR Guidance for Building-Related Products and Services Part B: Mechanical, Specialty, Thermal, and Acoustic Insulation Product EPD Requirements. Sept. 2019



**Program Operator**

SCS Global Services

2000 Powell Street, Ste. 600, Emeryville, CA 94608

+1.510.452.8000 | www.SCSglobalServices.com



Declaration Owner:	Aeroflex USA
Address:	232 Industrial Park Rd, Sweetwater, TN 37874
Declaration Number:	SCS-EPD-07134
Declaration Validity Period:	June 15, 2021 through June 14, 2026
Version:	June 22, 2023
Program Operator:	SCS Global Services
Declaration URL Link:	<a href="https://www.scsglobalservices.com/certified-green-products-guide">https://www.scsglobalservices.com/certified-green-products-guide</a>
LCA Practitioner:	Gerard Mansell, Ph.D., SCS Global Services
LCA Software and LCI database:	OpenLCA v1.10 software and the Ecoinvent v3.6 database
Product RSL:	25 years
Markets of Applicability:	North America;
EPD Type:	Product-Specific
EPD Scope:	Cradle-to-Grave
LCIA Method and Version:	CML-IA and TRACI 2.1
Independent critical review of the LCA and data, according to ISO 14044 and ISO 14071	<input type="checkbox"/> internal <input checked="" type="checkbox"/> external
LCA Reviewer:	 Thomas Gloria, Ph.D., Industrial Ecology Consultants
Part A Product Category Rule:	PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 3.2. UL Environment. Sept. 2018
Part A PCR Review conducted by:	Lindita Bushi, PhD (Chair); Hugues Imbeault-Tétreault, ing., M.Sc.A.; Jack Geibig
Part B Product Category Rule:	PCR Guidance for Building-Related Products and Services Part B: Mechanical, Specialty, Thermal, and Acoustic Insulation Product EPD Requirements. Sept. 2019
Part B PCR Review conducted by:	Hugues Imbeault-Tétreault, (Chair), Group AGECO; Thomas Gloria, Industrial Ecology Consultants; Andre Omer Desjarlais, Oak Ridge National Laboratory
Independent verification of the declaration and data, according to ISO 14025 and the PCR	<input type="checkbox"/> internal <input checked="" type="checkbox"/> external
EPD Verifier:	 Thomas Gloria, Ph.D., Industrial Ecology Consultants
Declaration Contents:	<ul style="list-style-type: none"> <li>1. Aeroflex USA.....2</li> <li>2. Product.....2</li> <li>3. LCA: Calculation Rules.....5</li> <li>4. LCA: Scenarios and Additional Technical Information.....11</li> <li>5. LCA: Results.....13</li> <li>6. LCA: Interpretation.....17</li> <li>7. Additional Environmental Information.....25</li> <li>8. Reference.....26</li> </ul>
<p><b>Disclaimers:</b> This EPD conforms to ISO 14025, 14040, 14044, and ISO 21930.</p> <p><b>Scope of Results Reported:</b> The PCR requirements limit the scope of the LCA metrics such that the results exclude environmental and social performance benchmarks and thresholds, and exclude impacts from the depletion of natural resources, land use ecological impacts, ocean impacts related to greenhouse gas emissions, risks from hazardous wastes and impacts linked to hazardous chemical emissions.</p> <p><b>Accuracy of Results:</b> Due to PCR constraints, this EPD provides estimations of potential impacts that are inherently limited in terms of accuracy.</p> <p><b>Comparability:</b> The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.</p> <p>In accordance with ISO 21930:2017, EPDs are comparable only if they comply with the core PCR, use the same sub-category PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works.</p>	

## 1. Aeroflex USA

Aeroflex USA manufactures the AEROFLEX® brand of EPDM (ethylene propylene diene monomer) elastomeric closed cell insulation for HVAC piping, ductwork & equipment, refrigeration and plumbing systems.

We source materials that minimize hazards to the environment and human health. Most of our products are manufactured in the U.S.A. utilizing an energy-efficient production process that yields minimal waste and contributes to favorable energy optimization, indoor environmental quality and building mechanical system life cycle costs.

## 2. Product

The AEROFLEX® products included in the EPD scope are summarized below.

### AEROFLEX EPDM™ Sheet and Roll



AEROFLEX EPDM™ Sheet & Roll insulation effectively retards heat gain or loss and controls condensation formation on plumbing equipment such as pumps, chillers, vessels and tanks. AEROFLEX® is designed for installation above and below ground, interior/exterior applications, can contribute to LEED® credits, is naturally resistant to microbiological growth, is Indoor Advantage™ Gold Certified for low chemical emissions and is 25/50 rated through 2" (51mm) thickness.

### AEROFLEX EPDM™ Sheet and Roll PSA



AEROFLEX EPDM™ Sheet & Roll PSA (Pressure-sensitive Adhesive) consists of a 3-mil thick, high-performance scrim reinforced, acrylic pressure sensitive adhesive, allowing installation without the need for extensive application of contact adhesive. The high-performance pressure sensitive adhesive bonds to a wide variety of metals, plastics and composite materials. The specially formulated and reinforced adhesive offers excellent UV and heat resistance, durability under stress, high peel and tack properties, and excellent performance at high and low temperatures. Sheet & Roll PSA is designed to insulate large OD pipes. Sheet & Roll PSA is designed for installation above and below ground, interior/exterior applications, is 25/50 rated from ¼" to 2" (6.4 mm to 51 mm) thickness, can contribute to LEED® credits, is naturally resistant to microbiological growth and is Indoor Advantage™ Gold Certified for low chemical emissions.

### AEROFLEX Breathe-EZ™ Duct Insulation; AEROFLEX Breathe-EZ™ PSA Duct Insulation



AEROFLEX Breathe-EZ™ Duct Insulation is engineered to perform as a fiber-free acoustic EPDM duct liner or wrap. AEROFLEX Breathe-EZ™ is plenum-rated, listed and labeled with a nationally-recognized test laboratory and safe for use in plenums and all building spaces meeting ASTM E84 25/50 through 2" [50 mm] thick. Due to its closed-cell structure and smooth skin, Breathe-EZ effectively controls condensation while providing an easy-to-maintain fiber-free surface facing the airstream. Due to its structure and density, Breathe-EZ attenuates lower-frequency airborne and structure-borne sound such as fan noise and sheet metal vibration. EPDM rubber is naturally microbial-resistant because it does not contain organic food sources. No antimicrobial chemicals are added. Breathe-EZ is available in standard sheets/rolls and with a PSA (pressure-sensitive adhesive back) option. Available in thicknesses of 1" [25 mm], 1-1/2" [38 mm] and 2" [50 mm] meeting ASHRAE 90.1, IECC and state energy codes.

## 2.2 Application

The AEROFLEX EPDM™ rubber insulation products provide the primary function of thermal insulation for commercial applications.

## 2.3 Technical Data

Technical specifications of the products included in the LCA scope, as well as product performance testing results are available on the manufacturer's website ([https:// www.aeroflexusa.com/](https://www.aeroflexusa.com/)) and summarized in Table 1 and Table 2.

**Table 1.** Technical performance specifications for the AEROFLEX EPDM™ Sheet & Roll insulation products.

Test Method	Test Results
ASTM C518 Steady-State Thermal Transmission Properties	Thermal conductivity = .245 @ 75°F [24°C]
ASTM C411 Hot Surface Performance of High Temperature Thermal Insulation	Service Temperature (Continuous) = -297°F [-183°C] - +257°F [+125°C]
ASTM C209 Cellulosic Fiber Insulating Board	Water Absorption (Volume %) = .2%
ASTM C534 Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet & Tubular Form	Flexibility = Pass
ASTM C692, DIN 1988 Influence of Thermal Insulations on External Stress Corrosion Cracking Tendency of Austenitic Stainless Steel	Non-corrosive
ASTM D635 Rate of Burning and/or Extent and Time of Burning Plastics in a Horizontal Position	Self-extinguishing
ASTM C1338 / G21 / UL 181 Determining Fungi Resistance of Insulation Materials and Facings	No growth
ASTM D1056 Flexible Cellular Materials - Sponge or Expanded Rubber	Closed Cell
ASTM D1171 Rubber Deterioration - Surface Ozone Cracking Outdoors	No cracking
ASTM E84 Surface Burning Characteristics of Building Materials	Pass 25/50 through 2" [50 mm] thickness
ASTM E96 Water Vapor Permeability of Materials	Water Vapor Permeability = .03 perm-inch (ULP = .01 perm-inch)
ASTM G7 Atmospheric Environmental Exposure Testing of Nonmetallic Materials	Minimal Cracking
NFPA 90A / 90B	Meets requirements
UL 94 Flammability of Plastic Materials for Parts in Devices and Appliances	UL-94 V-O
U.S. FDA CPG No. 7117.11 BESN 12868	Nitrosamine Content = None detected

**Table 2.** Technical performance specifications for the AEROFLEX Breathe-EZ™ Duct Insulation rubber insulation products.

Test Method	Test Results
ASTM C518/C177 Thermal Conductivity	0.3 Btu-in/h-sqft°F Max
ASTM E84 Surface burning	25/50 Rate
ASTM C1104 Water vapor Sorption	0.75% by Vol Max
ASTM C 1763 Water Absorption	0.2% max
ASTM C356 Dimension stability	7% max
ASTM C1304 Odor Emission	PASS
ASTM D 1338 Fungi Resistance	No Growth
ASTM G21 Fungi Resistance	No Growth
ASTM C 411 Hot surface at 250F	PASS
ASTM E96 Water Vapor Permeability	0.1% max
ASTM D 1171 Ozone Resistance	No crack
Nitrosamine Content	Not Detected

## 2.4 Base Materials

The products assessed include sheet and roll insulation products manufactured primarily from EPDM rubber. Packaging materials consist of corrugated board and plastic wrap.

**Table 3.** Material component summary for the AEROFLEX EPDM™ sheet and roll insulation products by mass and as a percentage of total mass.

Product	Units	Material				Packaging	
		Rubber	Plastics	Other	Total Product	Paperboard	Total Packaging
AEROFLEX EPDM™ Sheet & Roll	kg/m <sup>2</sup>	1.23	0.00	9.80x10 <sup>-3</sup>	1.24	0.394	0.394
	%	99%	0%	0.79%	100%	100%	100%
AEROFLEX EPDM™ Sheet & Roll PSA	kg/m <sup>2</sup>	1.85	0.00	6.47x10 <sup>-2</sup>	1.91	0.573	0.573
	%	97%	0%	3.4%	100%	100%	100%
AEROFLEX Breathe- EZ™ Duct Insulation	kg/m <sup>2</sup>	1.29	0.00	1.27x10 <sup>-2</sup>	1.30	0.971	0.971
	%	99%	0%	0.97%	100%	100%	100%
AEROFLEX Breathe- EZ™ PSA Duct Insulation	kg/m <sup>2</sup>	1.29	0.00	5.27x10 <sup>-2</sup>	1.34	0.971	0.971
	%	96%	0%	3.9%	100%	100%	100%

## 2.5 Manufacture

The AEROFLEX® insulation products are manufactured at the company's production facilities in the United States and Thailand. Resource use at the production facilities is allocated to the products based on mass.

## 2.6 Environment and Health during Manufacture

No environmental or health impacts are expected during the manufacture of the product.

## 2.7 Product Processing/Installation

Typical installation is accomplished using hand tools.

## 2.8 Packaging

The products are packaged for shipment using corrugated board and plastic wrap.

## 2.9 Condition of Use

No special conditions of use are noted.

## 2.10 Environment and Health during use

No environmental or health impacts are expected due to normal use of the roof boards.

## 2.11 Reference Service Life

The Reference Service Life (RSL) of the products is based on the manufacturer's estimated lifetime of 25 years. The building Estimated Service Life (ESL) is 75 years, consistent with the PCR.

## 2.12 Extraordinary Effects

No environmental or health impacts are expected due to extraordinary effects including fire and/or water damage and unforeseeable mechanical destruction.

## 2.13 Further Information

Further information on the product can be found on the manufacturers' website at [https:// www.aeroflexusa.com/](https://www.aeroflexusa.com/).

### 3. LCA: Calculation Rules

#### 3.1 Functional Unit

The functional units used for each product in the study is 1 m<sup>2</sup> of product installed for use over 75 years. The corresponding reference flow and number of product replacements required over the 75 year Estimated Service Life for each product system is also presented.

**Table 4.** Functional unit, Reference Service Life (RSL) and reference flows for AEROFLEX® rubber insulation products.

Product Name	Reference Flow	Units	Reference Service Life – RSL (years)	Replacement Cycle (ESL/RSL-1)
AEROFLEX EPDM™ Sheet and Roll	1.24	kg/m <sup>2</sup>	25	2
AEROFLEX EPDM™ Sheet and Roll PSA	1.91	kg/m <sup>2</sup>	25	2
AEROFLEX Breathe-EZ™ Duct Insulation	1.30	kg/m <sup>2</sup>	25	2
AEROFLEX Breathe-EZ™ PSA Duct Insulation	1.34	kg/m <sup>2</sup>	25	2

### 3.2 System Boundary

The scope of the EPD is cradle-to-grave, including raw material extraction and processing, transportation, product manufacture, product delivery, installation and use, and product disposal. The life cycle phases included in the EPD scope are described in Table 5 and illustrated in Figure 1.

**Table 5.** *The modules and unit processes included in the scope for the AEROFLEX® products.*

Module	Module Description	Unit Processes Included in Scope
A1	Extraction and processing of raw materials; any reuse of products or materials from previous product systems; processing of secondary materials; generation of electricity from primary energy resources; energy, or other, recovery processes from secondary fuels	Extraction and processing of raw materials for the rubber insulation product components.
A2	Transport (to the manufacturer)	Transport of component materials to the manufacturing facilities
A3	Manufacturing, including ancillary material production	Manufacturing of products and packaging (incl. upstream unit processes)
A4	Transport (to the building site)	Transport of product (including packaging) to the building site
A5	Construction-installation process	Impacts from the installation of product are assumed negligible. Only impacts from packaging disposal are included in this phase
B1	Product use	Use of the products in a commercial building setting. There are no associated emissions or impacts from the use of the product
B2	Product maintenance	No routine maintenance of the products is required once installed.
B3	Product repair	The products are not expected to require repair over their lifetime
B4	Product replacement	The materials and energy required for replacement of the product over the 75-year ESL of the assessment are included in this phase
B5	Product refurbishment	The products are not expected to require refurbishment over their lifetime
B6	Operational energy use by technical building systems	There is no operational energy use associated with the use of the product
B7	Operational water uses by technical building systems	There is no operational water use associated with the use of the product
C1	Deconstruction, demolition	Demolition of the product is accomplished using hand tools with no associated emissions and negligible impacts
C2	Transport (to waste processing)	Transport of insulation products to waste treatment at end-of-life
C3	Waste processing for reuse, recovery and/or recycling	The products are disposed of by recycling, landfilling or incineration which require no waste processing
C4	Disposal	Disposal of product
D	Reuse-recovery-recycling potential	Module Not Declared

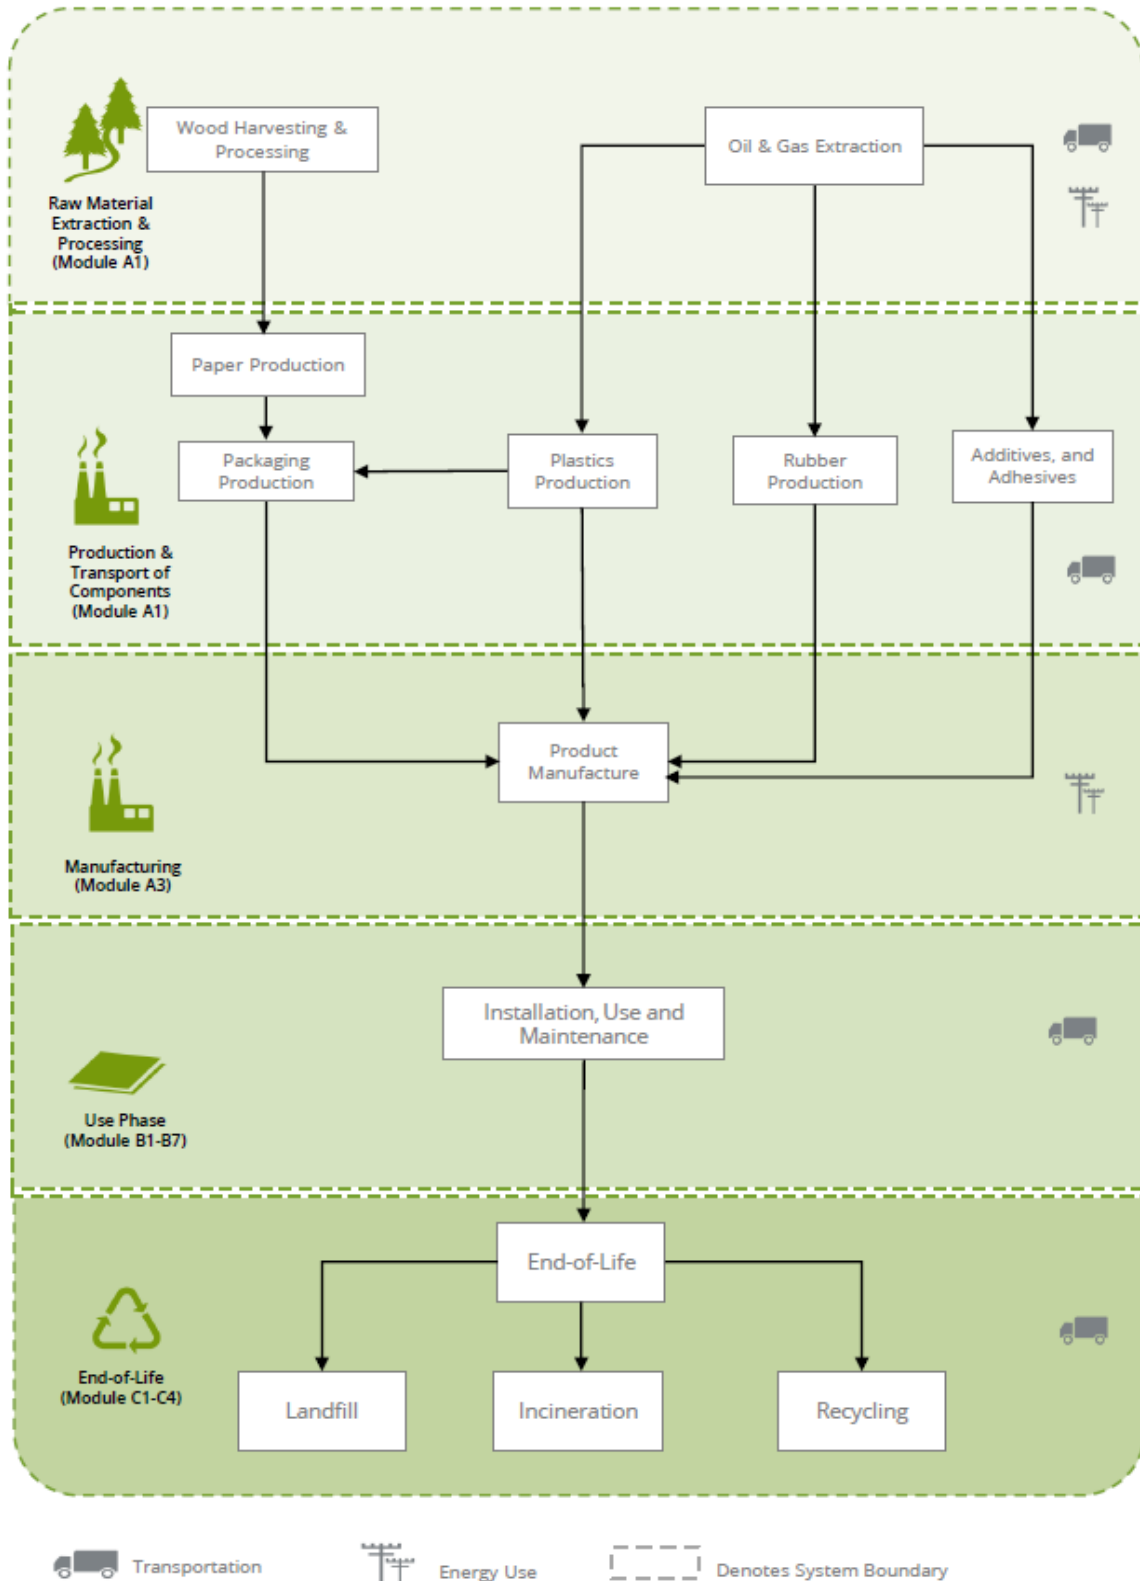


Figure 1. Flow diagram representing the major unit operations in the life cycle of the Aeroflex products.



### 3.3 Estimates and Assumptions

- Energy resource use and emissions at the Aeroflex manufacturing facilities were reported separately for electricity and fuel consumption (natural gas, propane). Resource use and emissions were allocated to the insulation products based on the product mass as a fraction of the total facility production.
- Electricity use at the manufacturing facilities is modeled using Ecoinvent inventory datasets modified to reflect the eGRID energy mix for the relevant NERC sub-region to estimate resource use and emissions. Ecoinvent datasets for the regional electricity grids are used to model resource use at the manufacturing facilities in Thailand and Germany.
- The Reference Service Life (RSL) of the products was modeled based on information provided by the manufacturer assuming their products are installed as recommended and used for the specific application noted.
- Lacking detailed supplier information, much of the upstream raw materials extraction and processing could not be modeled with actual process information. Representative data from the Ecoinvent LCI databases were utilized as appropriate.
- Downstream transport was modeled based on information provided by the manufacturer representing product distribution in North America.
- Specific data to estimate the recycling rates of product materials and packaging data were unavailable. Recycling rates for the product and packaging materials were based on the PCR requirements.
- Disposal of product and packaging is modeled based on regional statistics regarding municipal solid waste generation and disposal in the United States. The data include end-of-life recycling rates of product and packaging materials.
- For final disposal of the product and packaging material at end-of-life, all materials are assumed to be transported 20 miles (~32 km) by diesel truck to either a landfill, incineration facility, or material reclamation facility (for recycling). Datasets representing disposal in a landfill and waste incineration are from Ecoinvent.

It should also be noted that LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

The PCR allows for the results for several inventory flows related to construction products to be reported as “other parameters”. These are aggregated inventory flows, and do not characterize any potential impact; results should be interpreted considering this limitation.

### 3.4 Cut-off criteria

According to the PCR, processes contributing greater than 1% of the total environmental impact indicator for each impact are included in the inventory. No data gaps were allowed which were expected to significantly affect the outcome of the indicator results. No known flows are deliberately excluded from this EPD.

### 3.5 Background Data

Primary data were provided by Aeroflex USA for their manufacturing facilities. The sources of secondary LCI data are the Ecoinvent database.

**Table 6.** Data sources for the AEROFLEX® product system.

Component	Dataset	Data Source	Publication data
<b>PRODUCT</b>			
<b>Rubber</b>			
EPDM Compound	market for synthetic rubber   synthetic rubber   Cutoff/GLO	EI v3.6	2019
Masterbatch			
<i>EPDM</i>	market for synthetic rubber   synthetic rubber   Cutoff/GLO	EI v3.6	2019
<i>Flame retardant and Filler</i>	Confidential	EI v3.6	2019
<i>Flame retardant and Filler</i>	Confidential	EI v3.6	2019
<i>Plasticizer and additive</i>	Confidential	EI v3.6	2019
<i>Curative and Accelerator</i>	Confidential	EI v3.6	2019
<i>Curative and Accelerator</i>	Confidential	EI v3.6	2019
<i>Flame retardant and Filler</i>	Confidential	EI v3.6	2019
<i>Flame retardant and Filler</i>	Confidential	EI v3.6	2019
<i>Blowing Agent</i>	Confidential	EI v3.6	2019
<i>Curative and Accelerator</i>	Confidential	EI v3.6	2019
<i>Curative and Accelerator</i>	Confidential	EI v3.6	2019
<i>Curative and Accelerator</i>	Confidential	EI v3.6	2019
<i>Curative and Accelerator</i>	Confidential	EI v3.6	2019
<i>Flame retardant and Filler</i>	Confidential	EI v3.6	2019
<b>Other</b>			
PSA	market for acrylic binder, without water, in 34% solution state   acrylic binder, without water, in 34% solution state   Cutoff/RoW	EI v3.6	2019
<b>PACKAGING</b>			
Paperboard carton	market for corrugated board box   corrugated board box   Cutoff/RoW	EI v3.6	2019
Polypropylene can	market for polypropylene, granulate   polypropylene, granulate   Cutoff/GLO	EI v3.6	2019
Plastic wrap	market for packaging film, low density polyethylene   packaging film, low density polyethylene   Cutoff/GLO	EI v3.6	2019
<b>TRANSPORT</b>			
Diesel truck	market for transport, freight, lorry 16-32 metric ton, EURO4   transport, freight, lorry 16-32 metric ton, EURO4   Cutoff/RoW	EI v3.6	2019
Ocean freighter	transport, freight, sea, container ship   transport, freight, sea, container ship   Cutoff, S/GLO	EI v3.6	2019
<b>RESOURCES</b>			
Grid electricity	Electricity, medium voltage, per kWh - SRTV/SRTV	EI v3.6; eGRID	2019; 2018
	Electricity, medium voltage, per kWh - RFCE/RFCE	EI v3.6; eGRID	2019; 2018
	market for electricity, medium voltage   electricity, medium voltage   Cutoff/TH	EI v3.6	2019
	market for electricity, medium voltage   electricity, medium voltage   Cutoff/DE	EI v3.6	2019
Heat - natural gas	market group for heat, district or industrial, natural gas   heat, district or industrial, natural gas   Cutoff/GLO	EI v3.6	2019
Heat - propane	heat production, propane, at industrial furnace >100kW   heat, district or industrial, other than natural gas   Cutoff/RoW	EI v3.6	2019

### 3.6 Data Quality

The data quality assessment addressed the following parameters: time-related coverage, geographical coverage, technological coverage, precision, completeness, representativeness, consistency, reproducibility, sources of data, and uncertainty.

**Table 7.** Data quality assessment for the AEROFLEX® product system.

Data Quality Parameter	Data Quality Discussion
<b>Time-Related Coverage:</b> Age of data and the minimum length of time over which data is collected	The most recent available data are used, based on other considerations such as data quality and similarity to the actual operations. Typically, these data are less than 5 years old (typically 2016). All of the data used represented an average of at least one year's worth of data collection, and up to three years in some cases. Manufacturer-supplied data (primary data) are based on production data for 2019 and 2020.
<b>Geographical Coverage:</b> Geographical area from which data for unit processes is collected to satisfy the goal of the study	The data used in the analysis provide the best possible representation available with current data. Electricity use for product manufacture is modeled using representative data for the US, Thailand and Germany, as appropriate. Surrogate data used in the assessment are representative of global or European operations. Data representative of European operations are considered sufficiently similar to actual processes. Data representing product disposal are based on US statistics.
<b>Technology Coverage:</b> Specific technology or technology mix	For the most part, data are representative of the actual technologies used for processing, transportation, and manufacturing operations. Representative fabrication datasets, specific to the type of material, are used to represent the actual processes, as appropriate.
<b>Precision:</b> Measure of the variability of the data values for each data expressed	Precision of results are not quantified due to a lack of data. Data collected for operations were typically averaged for one or more years and over multiple operations, which is expected to reduce the variability of results.
<b>Completeness:</b> Percentage of flow that is measured or estimated	The LCA model included all known mass and energy flows for production of the insulation products. In some instances, surrogate data used to represent upstream and downstream operations may be missing some data which is propagated in the model. No known processes or activities contributing to more than 1% of the total environmental impact for each indicator are excluded.
<b>Representativeness:</b> Qualitative assessment of the degree to which the data set reflects the true population of interest	Data used in the assessment represent typical or average processes as currently reported from multiple data sources and are therefore generally representative of the range of actual processes and technologies for production of these materials. Considerable deviation may exist among actual processes on a site-specific basis; however, such a determination would require detailed data collection throughout the supply chain back to resource extraction.
<b>Consistency:</b> Qualitative assessment of whether the study methodology is applied uniformly to the various components of the analysis	The consistency of the assessment is considered to be high. Data sources of similar quality and age are used; with a bias towards Ecoinvent v3.6 data where available. Different portions of the product life cycle are equally considered; however, it must be noted that final disposition of the product is based on assumptions of current average practices in the United States.
<b>Reproducibility:</b> Qualitative assessment of the extent to which information about the methodology and data values would allow an independent practitioner to reproduce the results reported in the study	Based on the description of data and assumptions used, this assessment would be reproducible by other practitioners. All assumptions, models, and data sources are documented.
<b>Sources of the Data:</b> Description of all primary and secondary data sources	Data representing energy use at Aeroflex's manufacturing facilities represent an annual average and are considered of high quality due to the length of time over which these data are collected, as compared to a snapshot that may not accurately reflect fluctuations in production. For secondary LCI data, Ecoinvent v3.6 LCI data are used.
<b>Uncertainty of the Information:</b> Uncertainty related to data, models, and assumptions	Uncertainty related to materials in the insulation products and packaging is low. Actual supplier data for upstream operations was not available for all suppliers and the study relied upon the use of existing representative datasets. These datasets contained relatively recent data (<10 years) but lacked geographical representativeness. Uncertainty related to the impact assessment methods used in the study are high. The impact assessment method required by the PCR includes impact potentials, which lack characterization of providing and receiving environments or tipping points.

### 3.7 Period under review

The period of review represents production data for 2019 and 2020

### 3.8 Allocation

Manufacturing resource use was allocated to the products based on mass. Impacts from transportation were allocated based on the mass of material and distance transported.

### 3.9 Comparability

The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.

## 4. LCA: Scenarios and Additional Technical Information

### Delivery and Installation stage (A4 - A5)

Distribution of the insulation products to the point of installation is included in the assessment. Transportation parameters for modeling product distribution are summarized in Table 8. Average distances by transport mode were used to represent distribution to the North American consumer market.

**Table 8.** Distribution modeling parameters by product and transport mode per declared unit.

Transport Mode	Fuel utilization	Capacity utilization (%)
Diesel truck	42 L/100 km	76%
Product	Gross mass transported <sup>1</sup> (kg)	Transport Distance (km)
AEROFLEX EPDM™ Sheet and Roll	1.63	1,954
AEROFLEX EPDM™ Sheet and Roll PSA	2.48	1,954
AEROFLEX Breathe-EZ™ Duct Insulation	2.27	1,954
AEROFLEX Breathe-EZ™ PSA Duct Insulation	2.31	1,954

<sup>1</sup> Including packaging.

The impacts associated with the product installation are assumed negligible. The impacts associated with packaging disposal are included with the installation phase as per PCR requirements.

**Table 9.** Installation parameters for the AEROFLEX® products, per declared unit.

Parameter	Value		
Ancillary materials (kg)	negligible		
Net freshwater consumption (m <sup>3</sup> )	-		
Electricity consumption (kWh)	-		
Product loss per functional unit (kg)	negligible		
Waste materials generated by product installation (kg)	negligible		
Output materials resulting from on-site waste processing (kg)	na		
Direct emissions (kg)	-		
Product	Mass of packaging waste (kg)		Biogenic carbon contained in packaging (kg CO <sub>2</sub> )
	Corrugated	Plastic	
AEROFLEX EPDM™ Sheet and Roll	0.394	0.00	0.694
AEROFLEX EPDM™ Sheet and Roll PSA	0.573	0.00	1.01
AEROFLEX Breathe-EZ™ Duct Insulation	0.971	0.00	1.67
AEROFLEX Breathe-EZ™ Duct Insulation	0.971	0.00	1.67

**Use stage (B1)**

There are no direct impacts from the use of the products.

**Maintenance stage (B2)**

The products require no maintenance once installed and impacts for this life cycle stage are reported as zero.

**Repair/Refurbishment stage (B3; B5)**

Product repair and refurbishment are not relevant during the lifetime of the product.

**Replacement stage (B4)**

The materials and energy required for replacement of the product over the 75-year ESL of the assessment are included in this stage.

**Building operation stage (B6 – B7)**

There is no operational energy or water use associated with the use of the product.

**Disposal stage (C1 - C4)**

The disposal stage includes removal of the products (C1); transport of the products to waste treatment facilities (C2); waste processing (C3); and associated emissions as the product degrades in a landfill or is burned in an incinerator (C4). For the movable wall system products, no emissions are generated during demolition (C1) while no waste processing (C3) is required for incineration or landfill disposal.

Transportation of waste materials at end-of-life (C2) assumes a 20 mile (~32 km) average distance to disposal, consistent with assumptions used in the US EPA WARM model. The recycling rates used for the product packaging are based on regional statistics regarding municipal solid waste generation and disposal in the United States for 2015, from the US Environmental Protection Agency. The relevant disposal statistics used for the product and packaging are summarized in Table 10 and Table 11. For material not recycled, 80% are assumed landfilled and 20% incinerated.

**Table 10.** Recycling rates for packaging materials at end-of-life.

Material	Recycling Rate (%)	
	Product	Packaging
<b>Recycling Rates</b>		
Rubber	20.5%	n/a
Plastics	6.6%	15%
Paper & Pulp	n/a	75%
<b>Disposal of Non-recyclables</b>		
Landfill	80%	80%
Incineration	20%	20%

**Table 11.** End-of-life disposal scenario parameters for the AEROFLEX® insulation products.

Product	Scenario assumptions	Collection process		Recovery	Disposal			Removals of biogenic carbon
		Collected separately	Collected with mixed waste		Recycling	Landfill	Incineration	
AEROFLEX EPDM™ Sheet and Roll	EPA 2015	-	1.24	n/a	0.252	0.790	0.198	n/a
AEROFLEX EPDM™ Sheet and Roll PSA	EPA 2015	-	1.91	n/a	0.378	1.23	0.306	n/a
AEROFLEX Breathe-EZ™ Duct Insulation	EPA 2015	-	1.30	n/a	0.264	0.829	0.207	n/a
AEROFLEX Breathe-EZ™ PSA Duct Insulation	EPA 2015	-	1.34	n/a	0.264	0.861	0.215	n/a

## 5. LCA: Results

Results of the Life Cycle Assessment are presented below. It is noted that LCA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

**Table 12.** Life cycle phases included in the product system boundary.

Product			Construction Process		Use							End-of-life				Benefits and loads beyond the system boundary
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw material extraction and processing	Transport to manufacturer	Manufacturing	Transport	Construction - installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, recovery and/or recycling potential
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MND

X = Included in system boundary | MND = Module not declared

The following impact indicators, specified by the PCR, are reported below:

CML-IA Impact Category	Unit	TRACI 2.1 Impact Category	Unit
Global Warming Potential (GWP)	kg CO <sub>2</sub> eq	Global Warming Potential (GWP)	kg CO <sub>2</sub> eq
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11 eq	Ozone Depletion Potential (ODP)	kg CFC 11 eq
Acidification Potential of soil and water (AP)	kg SO <sub>2</sub> eq	Acidification Potential (AP)	kg SO <sub>2</sub> eq
Eutrophication Potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> eq	Eutrophication Potential (EP)	kg N eq
Photochemical Oxidant Creation Potential (POCP)	kg C <sub>2</sub> H <sub>4</sub> eq	Smog Formation Potential (SFP)	kg O <sub>3</sub> eq
Abiotic depletion potential (ADP-elements) for non-fossil resources	kg Sb eq	Fossil Fuel Depletion Potential (ADP <sub>fossil</sub> )	MJ Surplus, LHV
Abiotic depletion potential (ADP-fossil fuels) for fossil resources	MJ, LHV	-	-

The following inventory parameters, specified by the PCR, are also reported.

Resources	Unit	Waste and Outflows	Unit
RPR <sub>E</sub> : Renewable primary resources used as energy carrier (fuel)	MJ, LHV	HWD: Hazardous waste disposed	kg
RPR <sub>M</sub> : Renewable primary resources with energy content used as material	MJ, LHV	NHWD: Non-hazardous waste disposed	kg
NRPR <sub>E</sub> : Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	HLRW: High-level radioactive waste, conditioned, to final repository	kg
NRPR <sub>M</sub> : Non-renewable primary resources with energy content used as material	MJ, LHV	ILLRW: Intermediate- and low-level radioactive waste, conditioned, to final repository	kg
SM: Secondary materials	MJ, LHV	CRU: Components for re-use	kg
RSF: Renewable secondary fuels	MJ, LHV	MR: Materials for recycling	kg
NRSF: Non-renewable secondary fuels	MJ, LHV	MER: Materials for energy recovery	kg
RE: Recovered energy	MJ, LHV	EE: Recovered energy exported from the product system	MJ, LHV
FW: Use of net freshwater resources	m <sup>3</sup>	-	-

Modules B1, B2, B3, B5, B6 and B7 are not associated with any impact and are therefore declared as zero. In addition, module C1 and C3 are likewise not associated with any impact as the products are expected to be manually deconstructed. Additionally, as the products do not contain bio-based materials, biogenic carbon emissions and removals are not declared. Module D is not declared. In the interest of space and table readability, these modules are not included in the results presented below.

**Table 13.** Life Cycle Impact Assessment (LCIA) results for the AEROFLEX EPDM™ Sheet and Roll products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

Impact Category	A1	A2	A3	A4	A5	B4	C2	C4
<b>CML-IA</b>								
GWP (kg CO <sub>2</sub> eq)	3.01	0.372	1.86	0.545	0.138	14.2	5.06x10 <sup>-2</sup>	1.12
	14%	1.7%	8.7%	2.6%	0.65%	67%	0.24%	5.2%
ODP (kg CFC-11 eq)	4.65x10 <sup>-7</sup>	6.25x10 <sup>-8</sup>	1.51x10 <sup>-7</sup>	9.57x10 <sup>-8</sup>	3.09x10 <sup>-9</sup>	1.58x10 <sup>-6</sup>	8.81x10 <sup>-9</sup>	3.44x10 <sup>-9</sup>
	20%	2.6%	6.4%	4%	0.13%	67%	0.37%	0.15%
AP (kg SO <sub>2</sub> eq)	1.65x10 <sup>-2</sup>	5.56x10 <sup>-3</sup>	9.60x10 <sup>-3</sup>	2.14x10 <sup>-3</sup>	9.61x10 <sup>-5</sup>	6.87x10 <sup>-2</sup>	2.37x10 <sup>-4</sup>	1.82x10 <sup>-4</sup>
	16%	5.4%	9.3%	2.1%	0.093%	67%	0.23%	0.18%
EP (kg (PO <sub>4</sub> ) <sup>3-</sup> eq)	4.97x10 <sup>-3</sup>	7.15x10 <sup>-4</sup>	3.25x10 <sup>-3</sup>	5.09x10 <sup>-4</sup>	2.31x10 <sup>-4</sup>	2.36x10 <sup>-2</sup>	5.10x10 <sup>-5</sup>	2.08x10 <sup>-3</sup>
	14%	2%	9.2%	1.4%	0.65%	67%	0.14%	5.9%
POCP (kg C <sub>2</sub> H <sub>4</sub> eq)	1.04x10 <sup>-3</sup>	1.51x10 <sup>-4</sup>	4.00x10 <sup>-4</sup>	7.44x10 <sup>-5</sup>	2.88x10 <sup>-5</sup>	3.62x10 <sup>-3</sup>	7.83x10 <sup>-6</sup>	1.09x10 <sup>-4</sup>
	19%	2.8%	7.4%	1.4%	0.53%	67%	0.14%	2%
ADPE (kg Sb eq)	2.52x10 <sup>-8</sup>	2.60x10 <sup>-10</sup>	2.48x10 <sup>-8</sup>	5.60x10 <sup>-10</sup>	1.10x10 <sup>-11</sup>	1.02x10 <sup>-7</sup>	1.38x10 <sup>-11</sup>	6.21x10 <sup>-11</sup>
	17%	0.17%	16%	0.37%	0.0072%	67%	0.0091%	0.041%
ADPF (MJ eq)	68.5	5.13	22.7	8.05	0.251	211	0.692	0.327
	22%	1.6%	7.2%	2.5%	0.079%	67%	0.22%	0.1%
<b>TRACI 2.1</b>								
GWP (kg CO <sub>2</sub> eq)	2.97	0.371	1.85	0.544	0.125	13.9	5.06x10 <sup>-2</sup>	1.06
	14%	1.8%	8.8%	2.6%	0.6%	67%	0.24%	5.1%
ODP (kg CFC-11 eq)	5.99x10 <sup>-7</sup>	8.32x10 <sup>-8</sup>	1.81x10 <sup>-7</sup>	1.27x10 <sup>-7</sup>	4.11x10 <sup>-9</sup>	2.02x10 <sup>-6</sup>	1.17x10 <sup>-8</sup>	4.36x10 <sup>-9</sup>
	20%	2.7%	6%	4.2%	0.14%	67%	0.39%	0.14%
AP (kg SO <sub>2</sub> eq)	1.69x10 <sup>-2</sup>	5.98x10 <sup>-3</sup>	9.63x10 <sup>-3</sup>	2.51x10 <sup>-3</sup>	1.37x10 <sup>-4</sup>	7.15x10 <sup>-2</sup>	2.92x10 <sup>-4</sup>	3.38x10 <sup>-4</sup>
	16%	5.6%	9%	2.3%	0.13%	67%	0.27%	0.32%
EP (kg N eq)	9.99x10 <sup>-3</sup>	5.01x10 <sup>-4</sup>	6.67x10 <sup>-3</sup>	6.37x10 <sup>-4</sup>	5.83x10 <sup>-4</sup>	4.78x10 <sup>-2</sup>	3.84x10 <sup>-5</sup>	5.50x10 <sup>-3</sup>
	14%	0.7%	9.3%	0.89%	0.81%	67%	0.054%	7.7%
SFP (kg O <sub>3</sub> eq)	0.204	0.115	0.108	5.97x10 <sup>-2</sup>	3.06x10 <sup>-3</sup>	1.00	8.27x10 <sup>-3</sup>	4.60x10 <sup>-3</sup>
	14%	7.6%	7.2%	4%	0.2%	67%	0.55%	0.31%
FFD (MJ eq)	8.52	0.701	2.17	1.08	3.47x10 <sup>-2</sup>	25.3	9.81x10 <sup>-2</sup>	3.82x10 <sup>-2</sup>
	22%	1.8%	5.7%	2.9%	0.092%	67%	0.26%	0.1%



**Table 14.** Resource use and waste flows for the AEROFLEX EPDM™ Sheet and Roll products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

Parameter	A1	A2	A3	A4	A5	B4	C2	C4
<b>Resources</b>								
RPR <sub>E</sub> (MJ)	2.93	4.64x10 <sup>-2</sup>	3.52	8.93x10 <sup>-2</sup>	2.47x10 <sup>-3</sup>	13.2	2.55x10 <sup>-3</sup>	1.54x10 <sup>-2</sup>
	15%	0.23%	18%	0.45%	0.012%	67%	0.013%	0.078%
RPR <sub>M</sub> (MJ)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
NRPR <sub>E</sub> (MJ)	INA	INA	INA	INA	INA	INA	INA	INA
NRPR <sub>M</sub> (MJ)	INA	INA	INA	INA	INA	INA	INA	INA
SM (kg)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
RSF/NRSF (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
RE (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
FW (m <sup>3</sup> )	0.167	2.92x10 <sup>-3</sup>	0.158	5.85x10 <sup>-3</sup>	2.00x10 <sup>-4</sup>	0.672	2.28x10 <sup>-4</sup>	1.81x10 <sup>-3</sup>
	17%	0.29%	16%	0.58%	0.02%	67%	0.023%	0.18%
<b>Wastes</b>								
HWD (kg)	3.99x10 <sup>-5</sup>	9.59x10 <sup>-6</sup>	2.08x10 <sup>-5</sup>	2.15x10 <sup>-5</sup>	6.42x10 <sup>-7</sup>	1.91x10 <sup>-4</sup>	1.88x10 <sup>-6</sup>	1.40x10 <sup>-6</sup>
	14%	3.3%	7.3%	7.5%	0.22%	67%	0.66%	0.49%
NHWD (kg)	0.756	0.139	0.189	0.386	8.06x10 <sup>-2</sup>	4.72	3.28x10 <sup>-3</sup>	0.807
	11%	2%	2.7%	5.4%	1.1%	67%	0.046%	11%
HLRW (kg)	9.75x10 <sup>-6</sup>	2.11x10 <sup>-7</sup>	2.75x10 <sup>-5</sup>	4.39x10 <sup>-7</sup>	1.30x10 <sup>-8</sup>	7.60x10 <sup>-5</sup>	1.17x10 <sup>-8</sup>	8.22x10 <sup>-8</sup>
	8.5%	0.19%	24%	0.39%	0.011%	67%	0.01%	0.072%
ILLRW (kg)	2.31x10 <sup>-4</sup>	3.48x10 <sup>-5</sup>	1.51x10 <sup>-4</sup>	5.32x10 <sup>-5</sup>	1.71x10 <sup>-6</sup>	9.56x10 <sup>-4</sup>	4.92x10 <sup>-6</sup>	1.56x10 <sup>-6</sup>
	16%	2.4%	11%	3.7%	0.12%	67%	0.34%	0.11%
CRU (kg)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
MR (kg)	0.00	0.00	0.00	0.00	0.296	1.10	0.00	0.252
	0%	0%	0%	0%	18%	67%	0%	15%
MER (kg)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
EE (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.

INA = Indicator not assessed | Neg. = Negligible

**Table 15.** Life Cycle Impact Assessment (LCIA) results for the AEROFLEX EPDM™ Sheet and Roll PSA products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

Impact Category	A1	A2	A3	A4	A5	B4	C2	C4
<b>CML-IA</b>								
GWP (kg CO <sub>2</sub> eq)	4.60	0.565	2.84	0.828	0.200	21.6	7.79x10 <sup>-2</sup>	1.70
	14%	1.7%	8.8%	2.6%	0.62%	67%	0.24%	5.3%
ODP (kg CFC-11 eq)	7.04x10 <sup>-7</sup>	9.50x10 <sup>-8</sup>	2.31x10 <sup>-7</sup>	1.45x10 <sup>-7</sup>	4.50x10 <sup>-9</sup>	2.40x10 <sup>-6</sup>	1.36x10 <sup>-8</sup>	5.30x10 <sup>-9</sup>
	20%	2.6%	6.4%	4%	0.12%	67%	0.38%	0.15%
AP (kg SO <sub>2</sub> eq)	2.52x10 <sup>-2</sup>	8.37x10 <sup>-3</sup>	1.47x10 <sup>-2</sup>	3.25x10 <sup>-3</sup>	1.40x10 <sup>-4</sup>	0.105	3.64x10 <sup>-4</sup>	2.81x10 <sup>-4</sup>
	16%	5.3%	9.4%	2.1%	0.089%	67%	0.23%	0.18%
EP (kg (PO <sub>4</sub> ) <sup>3-</sup> eq)	7.60x10 <sup>-3</sup>	1.08x10 <sup>-3</sup>	4.95x10 <sup>-3</sup>	7.73x10 <sup>-4</sup>	3.36x10 <sup>-4</sup>	3.61x10 <sup>-2</sup>	7.86x10 <sup>-5</sup>	3.22x10 <sup>-3</sup>
	14%	2%	9.2%	1.4%	0.62%	67%	0.15%	6%
POCP (kg C <sub>2</sub> H <sub>4</sub> eq)	1.61x10 <sup>-3</sup>	2.28x10 <sup>-4</sup>	6.11x10 <sup>-4</sup>	1.13x10 <sup>-4</sup>	4.19x10 <sup>-5</sup>	5.56x10 <sup>-3</sup>	1.21x10 <sup>-5</sup>	1.68x10 <sup>-4</sup>
	19%	2.7%	7.3%	1.4%	0.5%	67%	0.14%	2%
ADPE (kg Sb eq)	3.83x10 <sup>-8</sup>	3.97x10 <sup>-10</sup>	3.81x10 <sup>-8</sup>	8.51x10 <sup>-10</sup>	1.60x10 <sup>-11</sup>	1.55x10 <sup>-7</sup>	2.13x10 <sup>-11</sup>	9.60x10 <sup>-11</sup>
	16%	0.17%	16%	0.36%	0.0068%	67%	0.0091%	0.041%
ADPF (MJ eq)	105	7.79	34.7	12.2	0.365	322	1.07	0.507
	22%	1.6%	7.2%	2.5%	0.076%	67%	0.22%	0.1%
<b>TRACI 2.1</b>								
GWP (kg CO <sub>2</sub> eq)	4.54	0.564	2.82	0.826	0.181	21.3	7.79x10 <sup>-2</sup>	1.62
	14%	1.8%	8.8%	2.6%	0.57%	67%	0.24%	5.1%
ODP (kg CFC-11 eq)	9.08x10 <sup>-7</sup>	1.26x10 <sup>-7</sup>	2.76x10 <sup>-7</sup>	1.93x10 <sup>-7</sup>	5.97x10 <sup>-9</sup>	3.07x10 <sup>-6</sup>	1.81x10 <sup>-8</sup>	6.73x10 <sup>-9</sup>
	20%	2.7%	6%	4.2%	0.13%	67%	0.39%	0.15%
AP (kg SO <sub>2</sub> eq)	2.57x10 <sup>-2</sup>	9.00x10 <sup>-3</sup>	1.47x10 <sup>-2</sup>	3.81x10 <sup>-3</sup>	2.00x10 <sup>-4</sup>	0.109	4.50x10 <sup>-4</sup>	5.23x10 <sup>-4</sup>
	16%	5.5%	9%	2.3%	0.12%	67%	0.28%	0.32%
EP (kg N eq)	1.53x10 <sup>-2</sup>	7.59x10 <sup>-4</sup>	1.02x10 <sup>-2</sup>	9.67x10 <sup>-4</sup>	8.47x10 <sup>-4</sup>	7.32x10 <sup>-2</sup>	5.92x10 <sup>-5</sup>	8.53x10 <sup>-3</sup>
	14%	0.69%	9.3%	0.88%	0.77%	67%	0.054%	7.8%
SFP (kg O <sub>3</sub> eq)	0.311	0.173	0.164	9.07x10 <sup>-2</sup>	4.45x10 <sup>-3</sup>	1.53	1.27x10 <sup>-2</sup>	7.10x10 <sup>-3</sup>
	14%	7.6%	7.2%	4%	0.19%	67%	0.56%	0.31%
FFD (MJ eq)	13.0	1.07	3.31	1.64	5.05x10 <sup>-2</sup>	38.5	0.151	5.91x10 <sup>-2</sup>
	22%	1.8%	5.7%	2.8%	0.087%	67%	0.26%	0.1%

**Table 16.** Resource use and waste flows for the AEROFLEX EPDM™ Sheet and Roll PSA products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

Parameter	A1	A2	A3	A4	A5	B4	C2	C4
<b>Resources</b>								
RPR <sub>E</sub> (MJ)	4.46	7.06x10 <sup>-2</sup>	5.23	0.136	3.59x10 <sup>-3</sup>	19.8	3.93x10 <sup>-3</sup>	2.37x10 <sup>-2</sup>
	15%	0.24%	18%	0.46%	0.012%	67%	0.013%	0.08%
RPR <sub>M</sub> (MJ)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
NRPR <sub>E</sub> (MJ)	INA	INA	INA	INA	INA	INA	INA	INA
NRPR <sub>M</sub> (MJ)	INA	INA	INA	INA	INA	INA	INA	INA
SM (kg)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
RSF/NRSF (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
RE (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
FW (m <sup>3</sup> )	0.257	4.45x10 <sup>-3</sup>	0.242	8.88x10 <sup>-3</sup>	2.91x10 <sup>-4</sup>	1.03	3.51x10 <sup>-4</sup>	2.77x10 <sup>-3</sup>
	17%	0.29%	16%	0.57%	0.019%	67%	0.023%	0.18%
<b>Wastes</b>								
HWD (kg)	6.13x10 <sup>-5</sup>	1.46x10 <sup>-5</sup>	3.16x10 <sup>-5</sup>	3.27x10 <sup>-5</sup>	9.33x10 <sup>-7</sup>	2.92x10 <sup>-4</sup>	2.90x10 <sup>-6</sup>	2.15x10 <sup>-6</sup>
	14%	3.3%	7.2%	7.5%	0.21%	67%	0.66%	0.49%
NHWD (kg)	1.15	0.212	0.285	0.586	0.117	7.21	5.05x10 <sup>-3</sup>	1.25
	11%	2%	2.6%	5.4%	1.1%	67%	0.047%	12%
HLRW (kg)	1.49x10 <sup>-5</sup>	3.22x10 <sup>-7</sup>	4.23x10 <sup>-5</sup>	6.67x10 <sup>-7</sup>	1.88x10 <sup>-8</sup>	1.17x10 <sup>-4</sup>	1.80x10 <sup>-8</sup>	1.27x10 <sup>-7</sup>
	8.5%	0.18%	24%	0.38%	0.011%	67%	0.01%	0.072%
ILLRW (kg)	3.50x10 <sup>-4</sup>	5.28x10 <sup>-5</sup>	2.31x10 <sup>-4</sup>	8.09x10 <sup>-5</sup>	2.49x10 <sup>-6</sup>	1.46x10 <sup>-3</sup>	7.58x10 <sup>-6</sup>	2.42x10 <sup>-6</sup>
	16%	2.4%	11%	3.7%	0.11%	67%	0.35%	0.11%
CRU (kg)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
MR (kg)	0.00	0.00	0.00	0.00	0.430	1.62	0.00	0.378
	0%	0%	0%	0%	18%	67%	0%	16%
MER (kg)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
EE (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.

INA = Indicator not assessed | Neg. = Negligible

**Table 17.** Life Cycle Impact Assessment (LCIA) results for the AEROFLEX Breathe-EZ™ Duct Insulation products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

Impact Category	A1	A2	A3	A4	A5	B4	C2	C4
<b>CML-IA</b>								
GWP (kg CO <sub>2</sub> eq)	3.42	0.393	2.38	0.758	0.339	17.0	5.31x10 <sup>-2</sup>	1.17
	13%	1.5%	9.3%	3%	1.3%	67%	0.21%	4.6%
ODP (kg CFC-11 eq)	5.31x10 <sup>-7</sup>	6.59x10 <sup>-8</sup>	2.02x10 <sup>-7</sup>	1.33x10 <sup>-7</sup>	7.62x10 <sup>-9</sup>	1.90x10 <sup>-6</sup>	9.24x10 <sup>-9</sup>	3.60x10 <sup>-9</sup>
	19%	2.3%	7.1%	4.7%	0.27%	67%	0.32%	0.13%
AP (kg SO <sub>2</sub> eq)	1.88x10 <sup>-2</sup>	6.15x10 <sup>-3</sup>	1.18x10 <sup>-2</sup>	2.98x10 <sup>-3</sup>	2.37x10 <sup>-4</sup>	8.08x10 <sup>-2</sup>	2.48x10 <sup>-4</sup>	1.91x10 <sup>-4</sup>
	16%	5.1%	9.8%	2.5%	0.2%	67%	0.2%	0.16%
EP (kg (PO <sub>4</sub> ) <sup>3-</sup> eq)	5.52x10 <sup>-3</sup>	7.80x10 <sup>-4</sup>	4.37x10 <sup>-3</sup>	7.07x10 <sup>-4</sup>	5.70x10 <sup>-4</sup>	2.83x10 <sup>-2</sup>	5.35x10 <sup>-5</sup>	2.18x10 <sup>-3</sup>
	13%	1.8%	10%	1.7%	1.3%	67%	0.13%	5.1%
POCP (kg C <sub>2</sub> H <sub>4</sub> eq)	1.16x10 <sup>-3</sup>	1.67x10 <sup>-4</sup>	5.14x10 <sup>-4</sup>	1.03x10 <sup>-4</sup>	7.10x10 <sup>-5</sup>	4.28x10 <sup>-3</sup>	8.21x10 <sup>-6</sup>	1.14x10 <sup>-4</sup>
	18%	2.6%	8%	1.6%	1.1%	67%	0.13%	1.8%
ADPE (kg Sb eq)	2.85x10 <sup>-8</sup>	2.66x10 <sup>-10</sup>	2.67x10 <sup>-8</sup>	7.79x10 <sup>-10</sup>	2.71x10 <sup>-11</sup>	1.13x10 <sup>-7</sup>	1.45x10 <sup>-11</sup>	6.52x10 <sup>-11</sup>
	17%	0.16%	16%	0.46%	0.016%	67%	0.0086%	0.039%
ADPF (MJ eq)	77.1	5.39	29.3	11.2	0.619	249	0.725	0.343
	21%	1.4%	7.8%	3%	0.17%	67%	0.19%	0.092%
<b>TRACI 2.1</b>								
GWP (kg CO <sub>2</sub> eq)	3.37	0.392	2.36	0.755	0.308	16.7	5.30x10 <sup>-2</sup>	1.11
	13%	1.6%	9.4%	3%	1.2%	67%	0.21%	4.4%
ODP (kg CFC-11 eq)	6.85x10 <sup>-7</sup>	8.76x10 <sup>-8</sup>	2.45x10 <sup>-7</sup>	1.77x10 <sup>-7</sup>	1.01x10 <sup>-8</sup>	2.44x10 <sup>-6</sup>	1.23x10 <sup>-8</sup>	4.57x10 <sup>-9</sup>
	19%	2.4%	6.7%	4.8%	0.28%	67%	0.34%	0.12%
AP (kg SO <sub>2</sub> eq)	1.92x10 <sup>-2</sup>	6.60x10 <sup>-3</sup>	1.21x10 <sup>-2</sup>	3.49x10 <sup>-3</sup>	3.38x10 <sup>-4</sup>	8.47x10 <sup>-2</sup>	3.06x10 <sup>-4</sup>	3.54x10 <sup>-4</sup>
	15%	5.2%	9.5%	2.7%	0.27%	67%	0.24%	0.28%
EP (kg N eq)	1.10x10 <sup>-2</sup>	5.33x10 <sup>-4</sup>	8.81x10 <sup>-3</sup>	8.85x10 <sup>-4</sup>	1.44x10 <sup>-3</sup>	5.69x10 <sup>-2</sup>	4.03x10 <sup>-5</sup>	5.77x10 <sup>-3</sup>
	13%	0.62%	10%	1%	1.7%	67%	0.047%	6.8%
SFP (kg O <sub>3</sub> eq)	0.232	0.126	0.149	8.29x10 <sup>-2</sup>	7.54x10 <sup>-3</sup>	1.22	8.67x10 <sup>-3</sup>	4.82x10 <sup>-3</sup>
	13%	6.9%	8.1%	4.5%	0.41%	67%	0.47%	0.26%
FFD (MJ eq)	9.56	0.738	2.93	1.50	8.56x10 <sup>-2</sup>	29.9	0.103	4.00x10 <sup>-2</sup>
	21%	1.6%	6.5%	3.4%	0.19%	67%	0.23%	0.089%

**Table 18.** Resource use and waste flows for the AEROFLEX Breathe-EZ™ Duct Insulation products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

Parameter	A1	A2	A3	A4	A5	B4	C2	C4
<b>Resources</b>								
RPR <sub>E</sub> (MJ)	3.32	4.80x10 <sup>-2</sup>	6.88	0.124	6.09x10 <sup>-3</sup>	20.8	2.67x10 <sup>-3</sup>	1.61x10 <sup>-2</sup>
	11%	0.15%	22%	0.4%	0.02%	67%	0.0086%	0.052%
RPR <sub>M</sub> (MJ)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
NRPR <sub>E</sub> (MJ)	INA	INA	INA	INA	INA	INA	INA	INA
NRPR <sub>M</sub> (MJ)	INA	INA	INA	INA	INA	INA	INA	INA
SM (kg)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
RSF/NRSF (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
RE (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
FW (m <sup>3</sup> )	0.187	3.01x10 <sup>-3</sup>	0.186	8.12x10 <sup>-3</sup>	4.94x10 <sup>-4</sup>	0.774	2.39x10 <sup>-4</sup>	1.90x10 <sup>-3</sup>
	16%	0.26%	16%	0.7%	0.043%	67%	0.021%	0.16%
<b>Wastes</b>								
HWD (kg)	4.50x10 <sup>-5</sup>	9.79x10 <sup>-6</sup>	3.14x10 <sup>-5</sup>	2.99x10 <sup>-5</sup>	1.58x10 <sup>-6</sup>	2.42x10 <sup>-4</sup>	1.97x10 <sup>-6</sup>	1.46x10 <sup>-6</sup>
	12%	2.7%	8.6%	8.2%	0.44%	67%	0.54%	0.4%
NHWD (kg)	0.831	0.138	0.333	0.536	0.198	5.77	3.44x10 <sup>-3</sup>	0.847
	9.6%	1.6%	3.8%	6.2%	2.3%	67%	0.04%	9.8%
HLRW (kg)	1.11x10 <sup>-5</sup>	2.17x10 <sup>-7</sup>	2.98x10 <sup>-5</sup>	6.10x10 <sup>-7</sup>	3.19x10 <sup>-8</sup>	8.37x10 <sup>-5</sup>	1.22x10 <sup>-8</sup>	8.62x10 <sup>-8</sup>
	8.8%	0.17%	24%	0.49%	0.025%	67%	0.0098%	0.069%
ILLRW (kg)	2.66x10 <sup>-4</sup>	3.66x10 <sup>-5</sup>	1.75x10 <sup>-4</sup>	7.40x10 <sup>-5</sup>	4.22x10 <sup>-6</sup>	1.12x10 <sup>-3</sup>	5.16x10 <sup>-6</sup>	1.64x10 <sup>-6</sup>
	16%	2.2%	10%	4.4%	0.25%	67%	0.31%	0.097%
CRU (kg)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
MR (kg)	0.00	0.00	0.00	0.00	0.728	1.98	0.00	0.264
	0%	0%	0%	0%	24%	67%	0%	8.9%
MER (kg)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
EE (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.

INA = Indicator not assessed | Neg. = Negligible

**Table 19.** Life Cycle Impact Assessment (LCIA) results for the AEROFLEX Breathe-EZ™ PSA Duct Insulation products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

Impact Category	A1	A2	A3	A4	A5	B4	C2	C4
<b>CML-IA</b>								
GWP (kg CO <sub>2</sub> eq)	3.49	0.399	2.44	0.771	0.339	17.4	5.47x10 <sup>-2</sup>	1.19
	13%	1.5%	9.3%	3%	1.3%	67%	0.21%	4.6%
ODP (kg CFC-11 eq)	5.37x10 <sup>-7</sup>	6.69x10 <sup>-8</sup>	2.06x10 <sup>-7</sup>	1.35x10 <sup>-7</sup>	7.62x10 <sup>-9</sup>	1.93x10 <sup>-6</sup>	9.52x10 <sup>-9</sup>	3.72x10 <sup>-9</sup>
	19%	2.3%	7.1%	4.7%	0.26%	67%	0.33%	0.13%
AP (kg SO <sub>2</sub> eq)	1.92x10 <sup>-2</sup>	6.17x10 <sup>-3</sup>	1.21x10 <sup>-2</sup>	3.03x10 <sup>-3</sup>	2.37x10 <sup>-4</sup>	8.23x10 <sup>-2</sup>	2.56x10 <sup>-4</sup>	1.97x10 <sup>-4</sup>
	16%	5%	9.8%	2.5%	0.19%	67%	0.21%	0.16%
EP (kg (PO <sub>4</sub> ) <sup>3-</sup> eq)	5.64x10 <sup>-3</sup>	7.86x10 <sup>-4</sup>	4.45x10 <sup>-3</sup>	7.19x10 <sup>-4</sup>	5.70x10 <sup>-4</sup>	2.90x10 <sup>-2</sup>	5.51x10 <sup>-5</sup>	2.26x10 <sup>-3</sup>
	13%	1.8%	10%	1.7%	1.3%	67%	0.13%	5.2%
POCP (kg C <sub>2</sub> H <sub>4</sub> eq)	1.20x10 <sup>-3</sup>	1.67x10 <sup>-4</sup>	5.25x10 <sup>-4</sup>	1.05x10 <sup>-4</sup>	7.10x10 <sup>-5</sup>	4.39x10 <sup>-3</sup>	8.46x10 <sup>-6</sup>	1.18x10 <sup>-4</sup>
	18%	2.5%	8%	1.6%	1.1%	67%	0.13%	1.8%
ADPE (kg Sb eq)	2.89x10 <sup>-8</sup>	2.72x10 <sup>-10</sup>	2.75x10 <sup>-8</sup>	7.92x10 <sup>-10</sup>	2.71x10 <sup>-11</sup>	1.15x10 <sup>-7</sup>	1.49x10 <sup>-11</sup>	6.74x10 <sup>-11</sup>
	17%	0.16%	16%	0.46%	0.016%	67%	0.0087%	0.039%
ADPF (MJ eq)	78.7	5.48	29.9	11.4	0.619	254	0.748	0.356
	21%	1.4%	7.8%	3%	0.16%	67%	0.2%	0.093%
<b>TRACI 2.1</b>								
GWP (kg CO <sub>2</sub> eq)	3.45	0.398	2.41	0.769	0.308	17.0	5.46x10 <sup>-2</sup>	1.14
	13%	1.6%	9.4%	3%	1.2%	67%	0.21%	4.4%
ODP (kg CFC-11 eq)	6.94x10 <sup>-7</sup>	8.89x10 <sup>-8</sup>	2.50x10 <sup>-7</sup>	1.80x10 <sup>-7</sup>	1.01x10 <sup>-8</sup>	2.48x10 <sup>-6</sup>	1.27x10 <sup>-8</sup>	4.73x10 <sup>-9</sup>
	19%	2.4%	6.7%	4.8%	0.27%	67%	0.34%	0.13%
AP (kg SO <sub>2</sub> eq)	1.96x10 <sup>-2</sup>	6.63x10 <sup>-3</sup>	1.24x10 <sup>-2</sup>	3.55x10 <sup>-3</sup>	3.38x10 <sup>-4</sup>	8.63x10 <sup>-2</sup>	3.16x10 <sup>-4</sup>	3.67x10 <sup>-4</sup>
	15%	5.1%	9.6%	2.7%	0.26%	67%	0.24%	0.28%
EP (kg N eq)	1.12x10 <sup>-2</sup>	5.40x10 <sup>-4</sup>	8.99x10 <sup>-3</sup>	9.00x10 <sup>-4</sup>	1.44x10 <sup>-3</sup>	5.83x10 <sup>-2</sup>	4.15x10 <sup>-5</sup>	5.99x10 <sup>-3</sup>
	13%	0.62%	10%	1%	1.6%	67%	0.047%	6.9%
SFP (kg O <sub>3</sub> eq)	0.237	0.127	0.152	8.44x10 <sup>-2</sup>	7.54x10 <sup>-3</sup>	1.24	8.93x10 <sup>-3</sup>	4.98x10 <sup>-3</sup>
	13%	6.8%	8.1%	4.5%	0.4%	67%	0.48%	0.27%
FFD (MJ eq)	9.75	0.750	2.99	1.53	8.56x10 <sup>-2</sup>	30.5	0.106	4.15x10 <sup>-2</sup>
	21%	1.6%	6.5%	3.3%	0.19%	67%	0.23%	0.091%

**Table 20.** Resource use and waste flows for the AEROFLEX Breathe-EZ™ Duct Insulation products over a 75-yr time horizon. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.


Parameter	A1	A2	A3	A4	A5	B4	C2	C4
<b>Resources</b>								
RPR <sub>E</sub> (MJ)	3.38	4.89x10 <sup>-2</sup>	6.92	0.126	6.09x10 <sup>-3</sup>	21.0	2.76x10 <sup>-3</sup>	1.66x10 <sup>-2</sup>
	11%	0.16%	22%	0.4%	0.019%	67%	0.0087%	0.053%
RPR <sub>M</sub> (MJ)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
NRPR <sub>E</sub> (MJ)	INA	INA	INA	INA	INA	INA	INA	INA
NRPR <sub>M</sub> (MJ)	INA	INA	INA	INA	INA	INA	INA	INA
SM (kg)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
RSF/NRSF (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
RE (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
FW (m <sup>3</sup> )	0.193	3.07x10 <sup>-3</sup>	0.191	8.27x10 <sup>-3</sup>	4.94x10 <sup>-4</sup>	0.795	2.46x10 <sup>-4</sup>	1.94x10 <sup>-3</sup>
	16%	0.26%	16%	0.69%	0.041%	67%	0.021%	0.16%
<b>Wastes</b>								
HWD (kg)	4.64x10 <sup>-5</sup>	1.00x10 <sup>-5</sup>	3.19x10 <sup>-5</sup>	3.04x10 <sup>-5</sup>	1.58x10 <sup>-6</sup>	2.48x10 <sup>-4</sup>	2.03x10 <sup>-6</sup>	1.51x10 <sup>-6</sup>
	12%	2.7%	8.6%	8.2%	0.43%	67%	0.55%	0.41%
NHWD (kg)	0.842	0.142	0.337	0.545	0.198	5.90	3.54x10 <sup>-3</sup>	0.879
	9.5%	1.6%	3.8%	6.2%	2.2%	67%	0.04%	9.9%
HLRW (kg)	1.14x10 <sup>-5</sup>	2.22x10 <sup>-7</sup>	3.06x10 <sup>-5</sup>	6.21x10 <sup>-7</sup>	3.19x10 <sup>-8</sup>	8.60x10 <sup>-5</sup>	1.26x10 <sup>-8</sup>	8.91x10 <sup>-8</sup>
	8.8%	0.17%	24%	0.48%	0.025%	67%	0.0098%	0.069%
ILLRW (kg)	2.69x10 <sup>-4</sup>	3.72x10 <sup>-5</sup>	1.80x10 <sup>-4</sup>	7.53x10 <sup>-5</sup>	4.22x10 <sup>-6</sup>	1.14x10 <sup>-3</sup>	5.32x10 <sup>-6</sup>	1.70x10 <sup>-6</sup>
	16%	2.2%	10%	4.4%	0.25%	67%	0.31%	0.099%
CRU (kg)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
MR (kg)	0.00	0.00	0.00	0.00	0.728	1.98	0.00	0.264
	0%	0%	0%	0%	24%	67%	0%	8.9%
MER (kg)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.
EE (MJ)	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.	Neg.

INA = Indicator not assessed | Neg. = Negligible

## 6. LCA: Interpretation

The interpretation phase conforms to ISO 14044 with further guidance from the ILCD General Guide for Life Cycle Assessment. The interpretation included the use of evaluation and sensitivity checks to steer the iterative process during the assessment, and a final evaluation including completeness, sensitivity, and consistency checks, at the end of the study.

The contributions to total impact indicator results are dominated by the product replacement phase (B4) of the assessment which account for approximately 67% of total impacts. Of the remaining life cycle phases, the raw material extraction and processing phase is generally the largest contributor to the overall impacts, followed by product manufacturing (A3), product distribution (A4) and upstream material transport (A2). Other life cycle phase contributions are minimal.

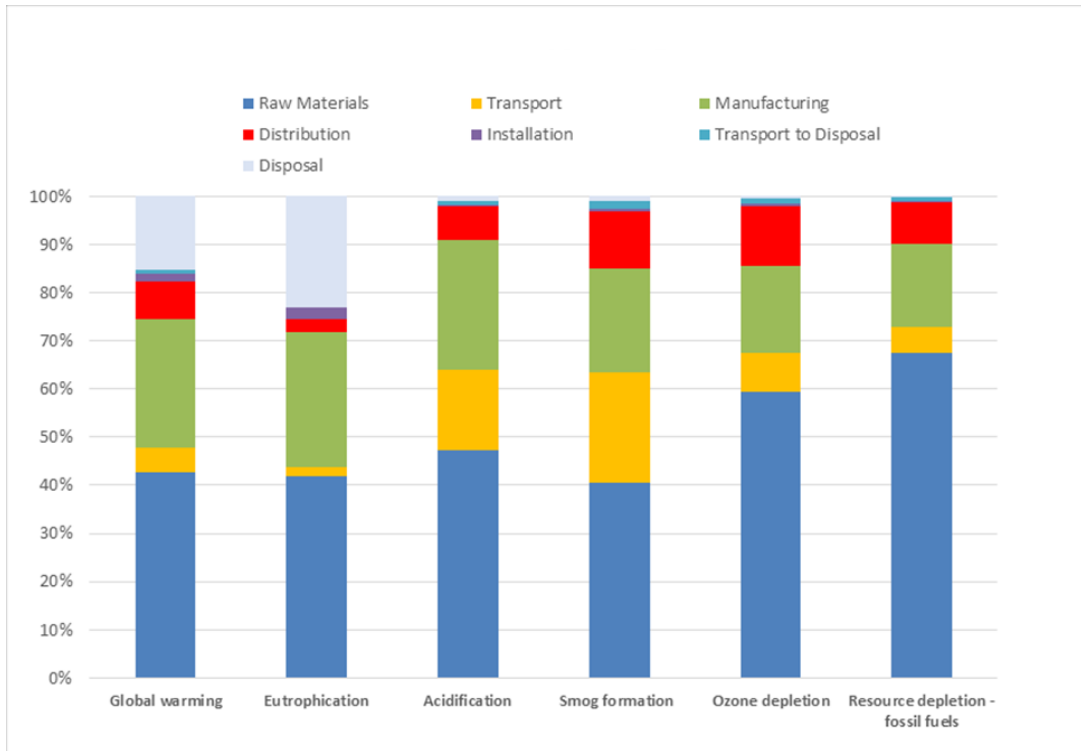

**Figure 3.** Contribution analysis for the AEROFLEX EPDM™ Sheet and Roll insulation products – TRACI 2.1. (Excluding product replacements)



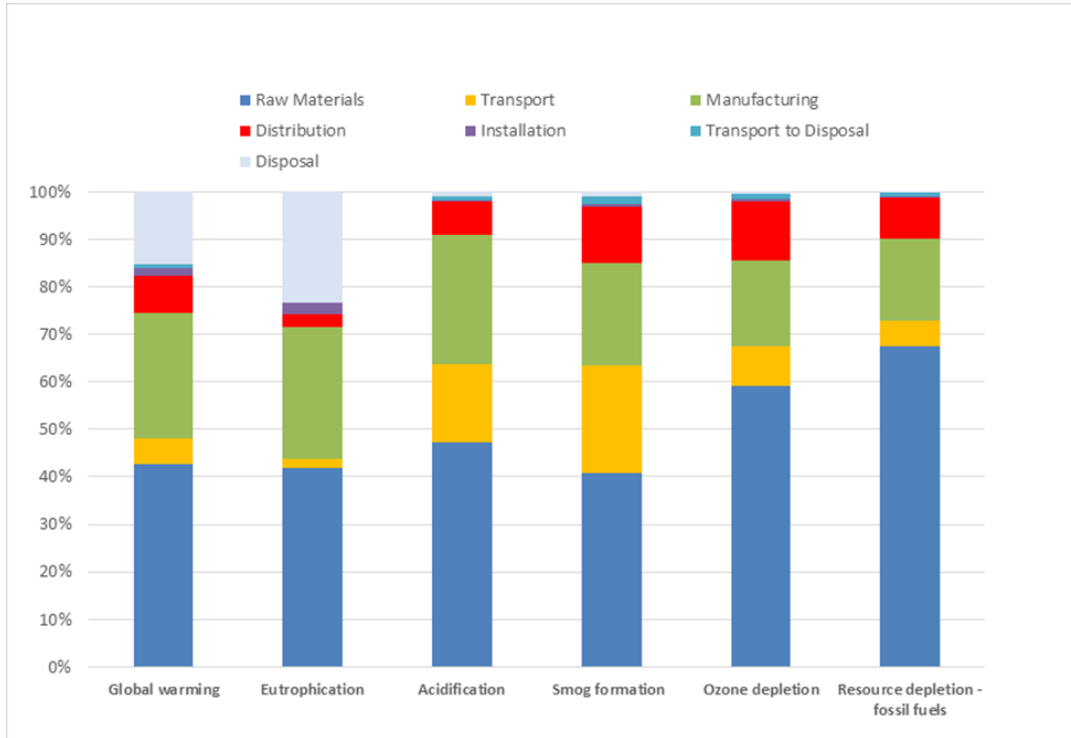


Figure 4. Contribution analysis for the AEROFLEX EPDM™ Sheet and Roll PSA insulation products – TRACI 2.1. (Excluding product replacements)


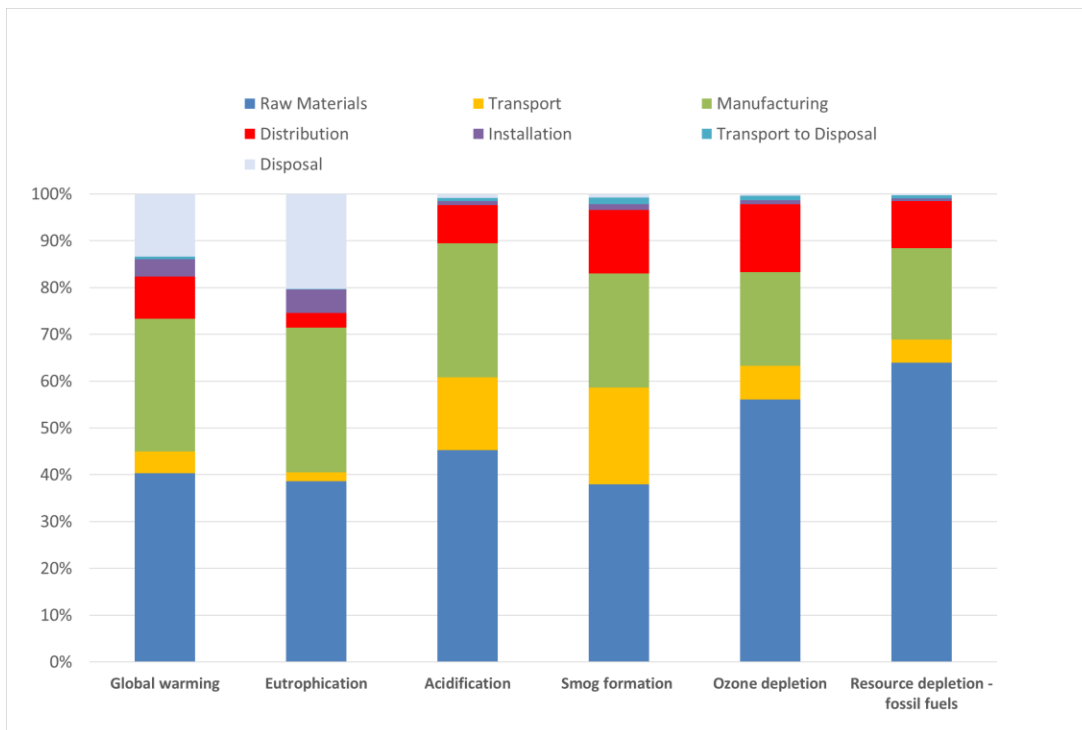


Figure 5. Contribution analysis for the AEROFLEX Breathe-EZ™ Duct Insulation products – TRACI 2.1. (Excluding product replacements)

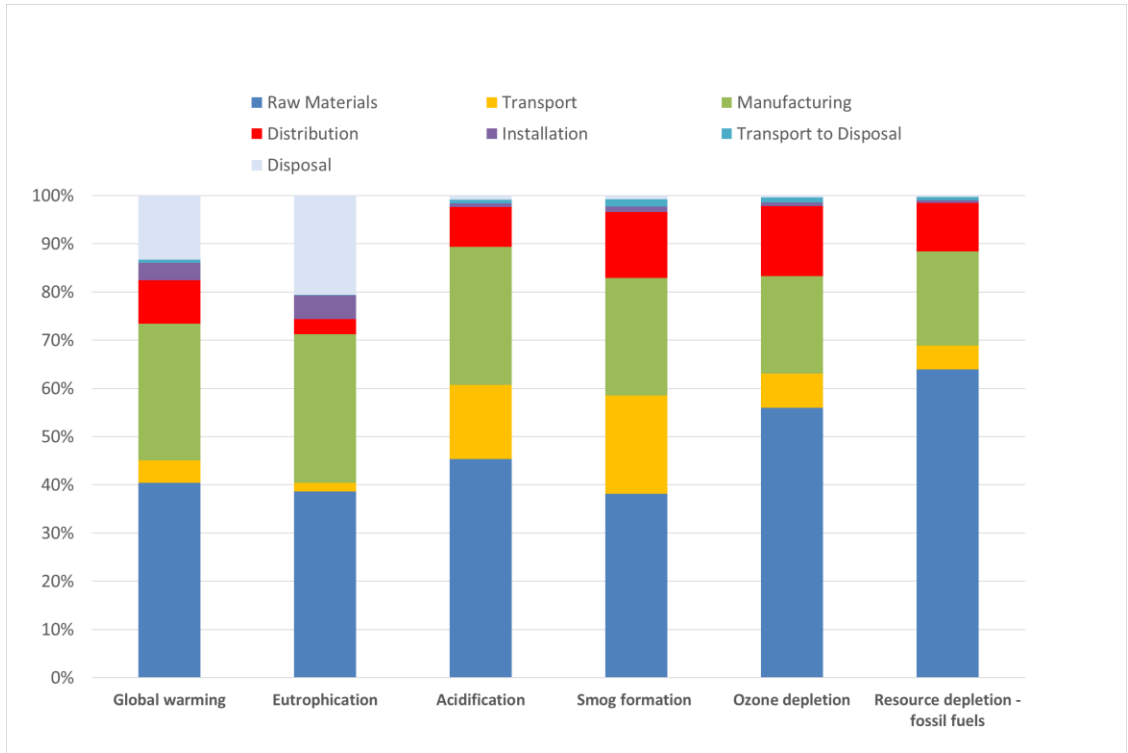

**Figure 6.** Contribution analysis for the AEROFLEX Breathe-EZ™ PSA Duct Insulation products – TRACI 2.1. (Excluding product replacements)

## 7. Additional Environmental Information

Aeroflex USA does not use CFCs, HFCs, or HCFCs in its manufacturing process.

## 8. References

- ❑ Life Cycle Assessment of AEROFLEX EPDM™ Rubber Insulation Products. SCS Global Services Report. Prepared for Aeroflex USA. February 2022.
- ❑ PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 3.2. UL Environment. Sept. 2018
- ❑ PCR Guidance for Building-Related Products and Services Part B: Mechanical, Specialty, Thermal, and Acoustic Insulation Product EPD Requirements. Sept. 2019
- ❑ ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and Procedures.
- ❑ ISO 14040:2006/Amd. 1:2020 Environmental Management – Life cycle assessment – Principles and Framework
- ❑ ISO 14044:2006/Amd. 1: 2017/Amd. 2::2020 Environmental Management – Life cycle assessment – Requirements and Guidelines.
- ❑ ISO 21930: 2017 Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services.
- ❑ SCS Type III Environmental Declaration Program: Program Operator Manual. V11.0 November 2021. SCS Global Services.
- ❑ Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI). Dr. Bare, J., <https://www.epa.gov/chemical-research/tool-reduction-and-assessment-chemicals-and-other-environmental-impacts-traci>.
- ❑ CML-IA Characterization Factors. Leiden University, Institute of Environmental Sciences. April 2013. <http://cml.leiden.edu/software/data-cmlia.html>
- ❑ Ecoinvent Centre (2019) ecoinvent data from v3.6. Swiss Center for Life Cycle Inventories, Dübendorf, 2019, <http://www.ecoinvent.org>
- ❑ European Joint Research Commission. International Reference Life Cycle Data System handbook. *General guide for Life Cycle Assessment – Detailed Guidance*. © European Union, 2010.

For more information, contact:



**AEROFLEX®**

**Aeroflex USA**

232 Industrial Park Rd,  
Sweetwater, TN 37874 United States  
[www.aeroflexusa.com](http://www.aeroflexusa.com) | +1.866.237.6235



**SCS Global Services**

2000 Powell Street, Ste. 600, Emeryville, CA 94608 USA  
Main +1.510.452.8000 | fax +1.510.452.8001